


**PROP REACTIONS**

LOAD/REACTION	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
SWL-UDL (kg)	5000	4000	3200	2500
RA* (t)	9.9	10.1	10.8	12.0
RB* (t)	6.6	7.2	8.1	9.5
RC* (t)	-0.4	-0.3	-0.1	-0.1
Deflections at outer wheel (mm)	△5	△6	△7	△9
Deflections at free end (mm)	△29	△29	△30	△31


OUTBOARD	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
E = (Distance from slab edge to back end of H frame) (mm)	0	250	500	750
D = (Distance from centre line of inner prop to slab edge) (mm)	1643	1393	1143	893

DIMENSIONS
Length 8500mm    Width 3200mm    Height 1202mm

TARE
Weight 3000 kg

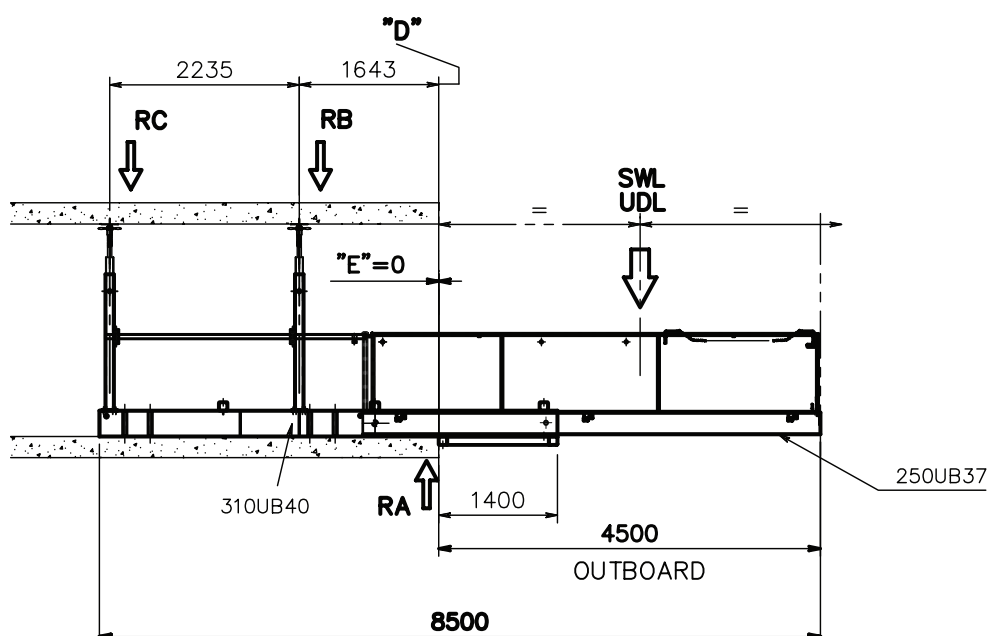

**SIDE ELEVATION**

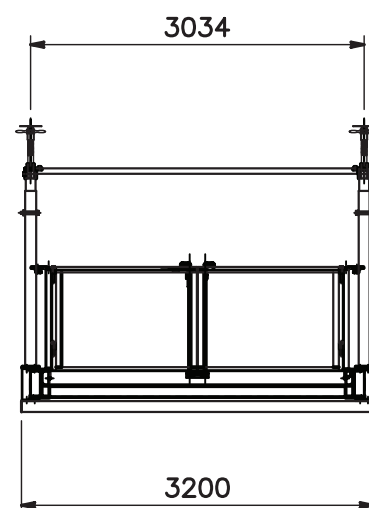

**FRONT ELEVATION**

\*Reactions on each side of the platform.  
Assumed load always centre both ways on the outboard of the platform. All loads are static loads i.e. no load factors applied. Horizontal forced not taken into account. Reactions provided based on rigid supports i.e. effects on deflections of supporting slabs not factored into design.


**PROP REACTIONS**

LOAD/REACTION	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
SWL-UDL (kg)	5000	4000	3200	2500
RA* (t)	5.9	5.4	5.1	4.8
RB* (t)	N/A	N/A	N/A	N/A
RC* (t)	2.2	2.2	2.3	2.3
Deflections at outer wheel (mm)	10	11	13	14
Deflections at free end (mm)	44	44	45	45


OUTBOARD	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
E = (Distance from slab edge to back end of H frame) (mm)	0	250	500	750
D = (Distance from centre line of inner prop to slab edge) (mm)	1643	1393	1143	893

DIMENSIONS
Length 8500mm    Width 3200mm    Height 1202mm

TARE
Weight 3000 kg

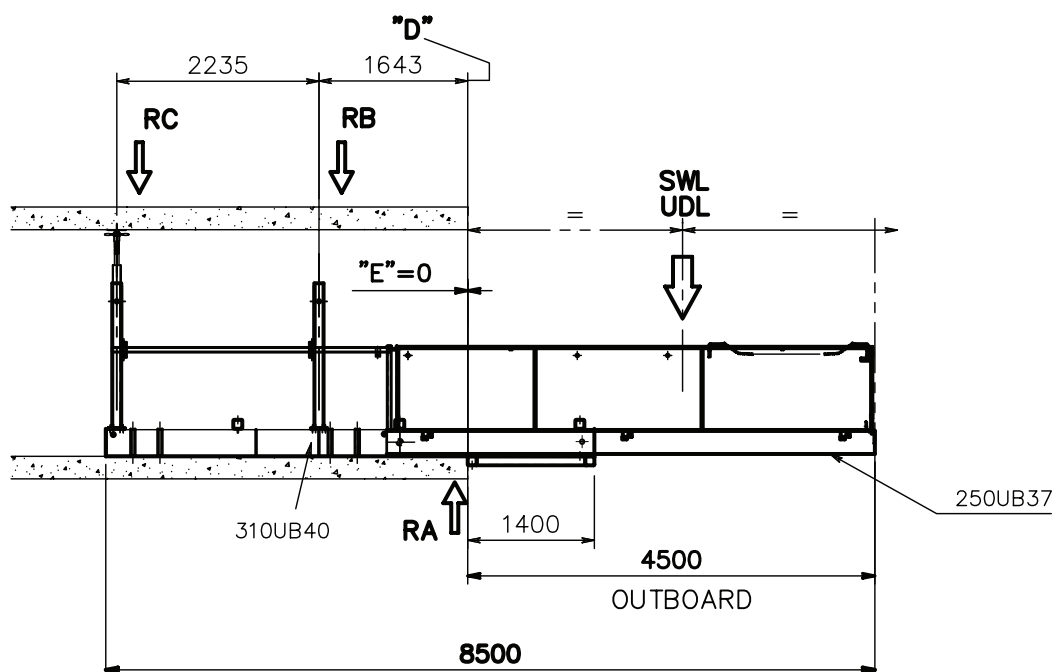

**SIDE ELEVATION**

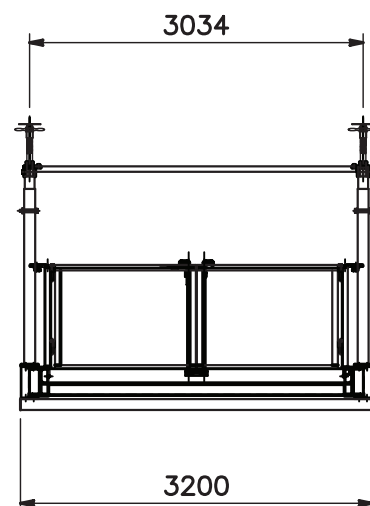

**FRONT ELEVATION**

\*Reactions on each side of the platform.

Assumed load always centre both ways on the outboard of the platform. All loads are static loads i.e. no load factors applied. Horizontal forces not taken into account. Reactions provided based on rigid supports i.e. effects on deflections of supporting slabs not factored into design.


## BOLTDOWN REACTIONS

LOAD/REACTION	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
SWL-UDL (kg)	5000	4000	3200	2500
RA* (t)	10.1	10.4	11.1	12.4
RB* (t)	6.9	7.5	8.4	9.7
RC* (t)	-0.5	-0.3	-0.1	0.2
Deflections at outer wheel (mm)	△5	△6	△7	△9
Deflections at free end (mm)	△29	△29	△30	△31

OUTBOARD	4500mm Outboard	4750mm Outboard	5000mm Outboard	5250mm Outboard
E = (Distance from slab edge to back end of H frame) (mm)	0	250	500	750
D = (Distance from centre line of inner prop to slab edge) (mm)	1220	970	720	470

DIMENSIONS
Length 8500mm    Width 3200mm    Height 1202mm

TARE
Weight 3000 kg

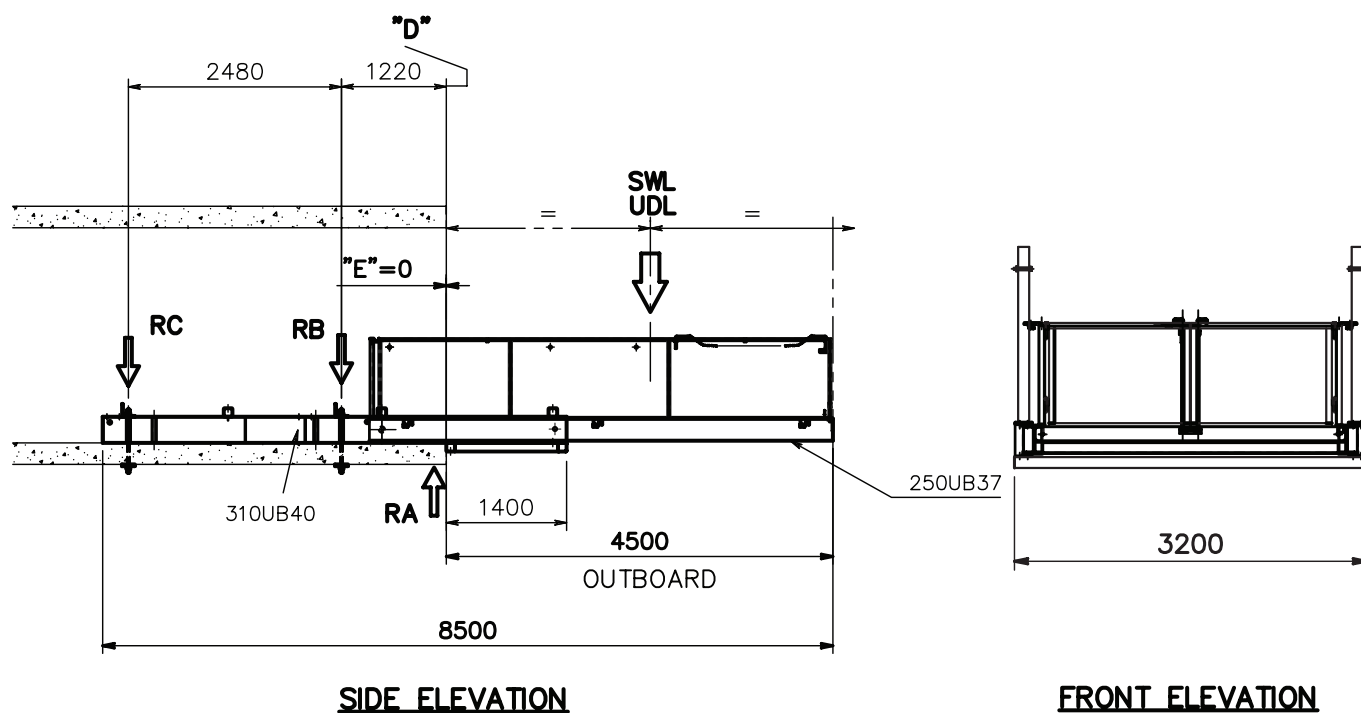

\*Reactions on each side of the platform.

Assumed load always centre both ways on the outboard of the platform. All loads are static loads i.e. no load factors applied. Horizontal forces not taken into account. Reactions provided based on rigid supports i.e. effects on deflections of supporting slabs not factored into design.



 **Auckland**

 **Wellington**

 **Christchurch**



## **SPECIALISED EQUIPMENT HIRE SOLUTIONS**

### **Service Facility Location**

Preston Hire - New Zealand  
31 Patiki Rd,  
Avondale, Auckland 1026  
[nzsales@prestonhire.co.nz](mailto:nzsales@prestonhire.co.nz)

*\*Preston Hire available across Oceania*



**COUNT ON US**

**0800 440 558 | [prestonhire.co.nz](http://prestonhire.co.nz)**